



ConexGoTM

The web portal dedicated to workers solutions

ConexGo
Secured Web
Access
Conexgo.ca



[Forgot Password?](#)

Overview of the ConexGo web portal

The screenshot displays the ConexGo web portal dashboard. At the top left is the ConexGo logo. The top navigation bar includes a menu icon, version 'V 1.0.0', the date and time 'Mon, 11 September 2023 11:52:53 AM', a notification bell, a language dropdown set to 'English - US', and a user profile icon labeled 'demo'. A left sidebar menu contains 'MAIN', 'Home', 'Devices', 'Groups', 'Alerts', and 'Users'. The main content area features three summary cards: 'Total Alerts' with a value of 17, 'Total Devices' with a value of 2, and 'Total Online Device' with a value of 1. Below these are two sections: 'Latest Alerts' and 'Device Status'. The 'Latest Alerts' section shows a vertical list of five alerts, including two low battery warnings and three SOS alerts. The 'Device Status' section contains a table with columns for MODEL, INVENTORY, ACTIVE, SUSPENDED, and DEACTIVE, showing data for a 'G-Safe' device.

Total Alerts
17

Total Devices
2

Total Online Device
1

Latest Alerts

- 12%! Alerte de batterie faible 15 %** 2023-09-05 1:21 PM
DEMO G-SAFE SYLVAIN (4176) - demo laxson 2045 de la Métropole Longueuil, Québec, G8J 1L8, Canada
- 14%! Alerte de batterie faible 15 %** 2023-09-03 10:25 PM
DEMO G-SAFE SYLVAIN (4176) - demo laxson 2045 de la Métropole Longueuil, Québec, G8J 1L8, Canada
- SOS Alert** 2023-08-30 9:29 AM
G-SAFE (1617) Demo - demo laxson 2045 de la Métropole Longueuil, Québec, G8J 1L8, Canada
- SOS Alert** 2023-08-29 3:21 PM
G-SAFE (1617) Demo - demo laxson 2045 de la Métropole Longueuil, Québec, G8J 1L8, Canada
- SOS Alert** 2023-08-29 1:22 PM
G-SAFE (1617) Demo - demo laxson 2045 de la Métropole Longueuil, Québec, G8J 1L8, Canada

Device Status

MODEL	INVENTORY	ACTIVE	SUSPENDED	DEACTIVE
G-Safe	0	2	0	0

Login in the portal for the first time

Conexgo portal usage Terms and Conditions

These Terms of Service ("Terms", "Terms of Service") govern your relationship with the Conexgo.ca website (the "Service") operated by Conexgo ("us", "we", or "our").

Please read these Terms of Service carefully before using the Service.

Your access to and use of the Service is based on your acceptance of and compliance with these Terms. These Terms apply to all visitors, users and others who access or use the Service, without limitation.

By accessing or using the Service you agree to be bound by these Terms and accept all legal consequences. If you do not agree to these terms and conditions, in whole or in part, please do not use the Service.

Accounts

When you create an account with us, it is mandatory that you provide us information that is accurate, complete, and current at all times. Failure to do so constitutes a breach of the Terms, which may result in immediate termination of your account on our Service.

By continuing to access or use our Service after those revisions become effective, you agree to be bound by the revised terms. If you do not agree to the new terms, in whole or in part, we strongly insist that you cease using the website and the Service immediately.

Contact Us

If you have any questions about these Terms, please contact us immediately at support@conexgo.ca

Agree


Sign Out

1) When you sign in the first time, you must accept the terms of use of the portal in order to continue

Upon your first access

You will be invited to change your password

The password must be at least 6 characters long and contain a non-alphanumeric value and at least 1 number.

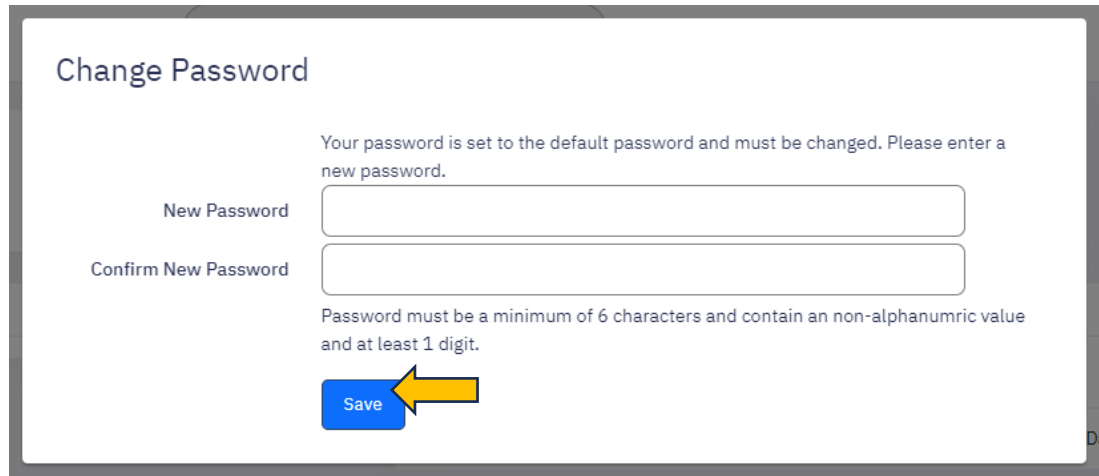

Change Password

Your password is set to the default password and must be changed. Please enter a new password.


New Password

Confirm New Password


Password must be a minimum of 6 characters and contain an non-alphanumeric value and at least 1 digit.

Success

Password updated successfully

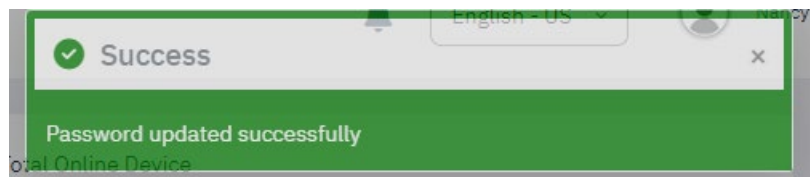

Selecting the time zone, either click Automatic time zone according to your PC *Recommended or select the time zone of your location. A success message will be displayed

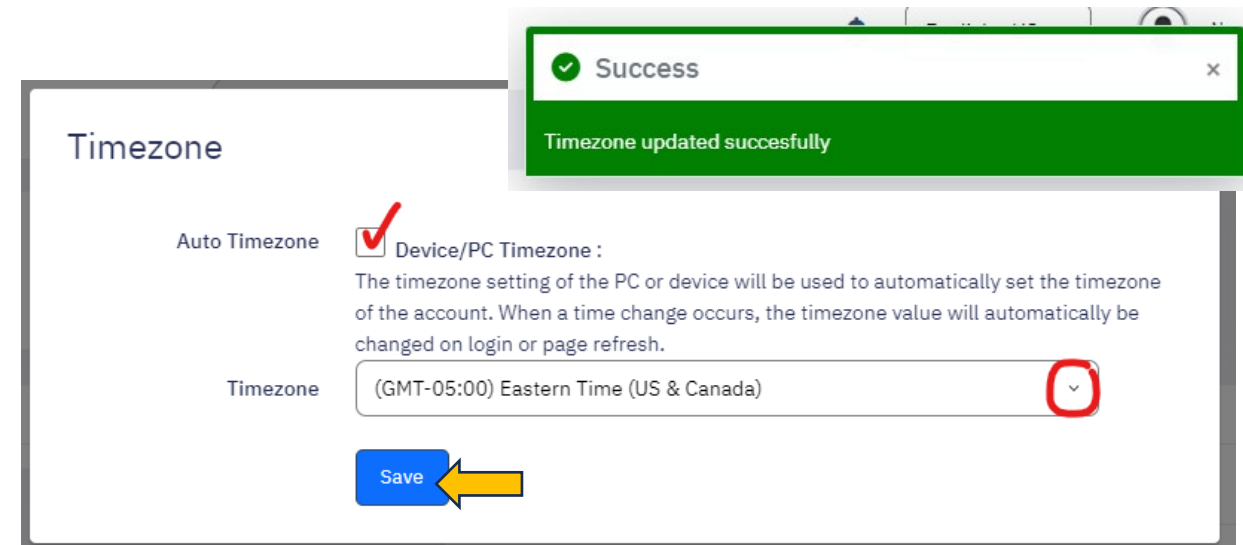

Timezone

Auto Timezone Device/PC Timezone :
The timezone setting of the PC or device will be used to automatically set the timezone of the account. When a time change occurs, the timezone value will automatically be changed on login or page refresh.

Timezone (GMT-05:00) Eastern Time (US & Canada)

Success

Timezone updated successfully


Your Home dashboard

You main menu is the Home dashboard section



'Profil' Section

In the top right section of the portal, you will find your 'Profile' section for editing your information, accessing documents relevant to your account and support links for guides, tech support, videos, etc

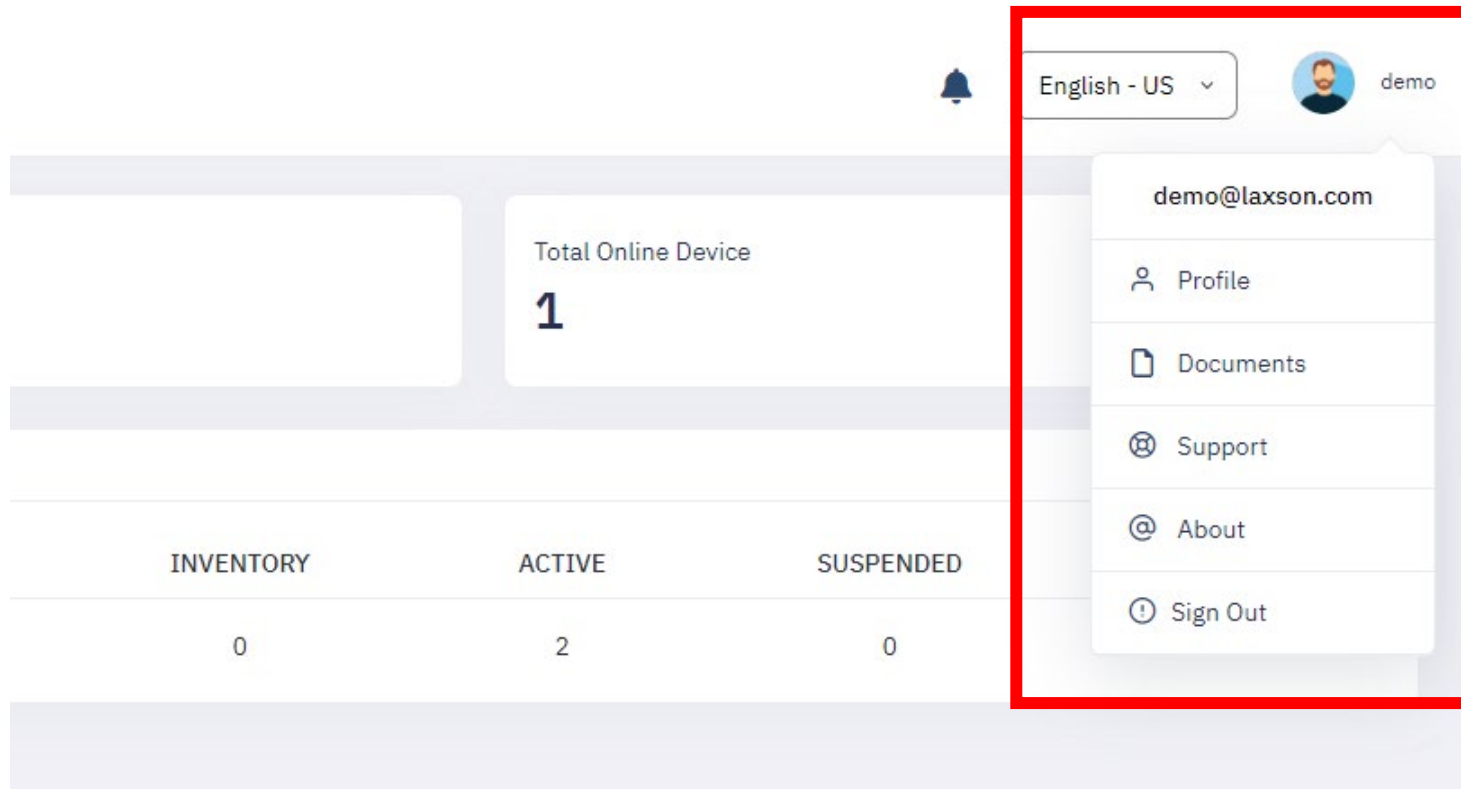


- **Profil:** For updating password, language and time
- Documents:** Such as copy of agreement or other relevant to your account
- **Support:** A dedicated customer link for support information, such as guides, videos, forms, order area and tech support link
- **About:** Info about portal updates
- **Logout:** Logout from the portal

Support Section

Section dedicated for customers:

You will find in this section documents that has been uploaded by Laxson pertinent to your account, such as user guides and account documents. You will be able to view and download the documents from here.

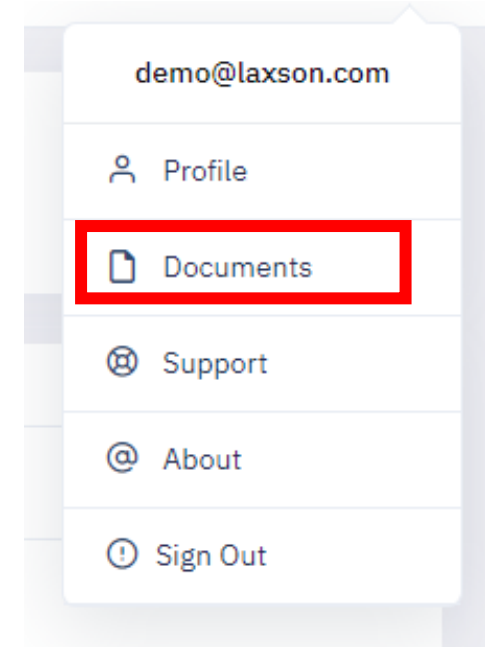

Accounts Home / Accounts / Documents

Documents

Search...

Number to Display : 10

NAME	DESCRIPTION	DOWNLOAD
Welcome Letter	Your account welcome letter	



Section Support

Section dedicated to customers:

Support section with links to request technical support help, guides, videos, FAQ's and even place an order for product accessories.









demo@laxson.com

- Profile
- Documents
- Support**
- About
- Sign Out

Support

Support

 Tech Support	 FAQ
 Guides & Videos	 Product Order
 Contact Us	 Blog

Home Menu

Your easy to view dashboard:

Left Menus

You can also switch your language selection from here.

The screenshot shows the ConexGo dashboard interface. On the left is a navigation menu with 'Home' highlighted in a red box. The main dashboard area contains several widgets: 'Total Alerts' (17), 'Total Devices' (2), and 'Total Online Device' (1). Below these are 'Latest Alerts' and 'Device Status' sections. The 'Device Status' section includes a table with columns for MODEL, INVENTORY, ACTIVE, SUSPENDED, and DEACTIVE. Annotations include a blue arrow pointing to the 'Total Alerts' widget, a yellow arrow pointing to the 'Total Devices' widget, a yellow arrow pointing to the 'Total Online Device' widget, a yellow arrow pointing to the 'Device Status' table, and a blue arrow pointing to the 'Latest Alerts' list. A language selection dropdown is visible in the top right corner, and a notification bell icon is circled in red.

Left Menu:

- Home
- Devices
- Groups
- Alerts
- Users

Dashboard Summary:

- Total Alerts: 17
- Total Devices: 2
- Total Online Device: 1

Latest Alerts:

- 12%! Alerte de batterie faible 15 % 2023-09-05 1:21 PM
DEMO G-SAFE SYLVAIN (4176) - demo laxson 2045 de la Métropole Longueuil, Québec, G8J 1L8, Canada
- 14%! Alerte de batterie faible 15 % 2023-09-03 10:25 PM
DEMO G-SAFE SYLVAIN (4176) - demo laxson 2045 de la Métropole Longueuil, Québec, G8J 1L8, Canada
- SOS Alert 2023-08-30 9:29 AM
G-SAFE (1617) Demo - demo laxson 2045 de la Métropole Longueuil, Québec, G8J 1L8, Canada
- SOS Alert 2023-08-29 3:21 PM
G-SAFE (1617) Demo - demo laxson 2045 de la Métropole Longueuil, Québec, G8J 1L8, Canada
- SOS Alert 2023-08-29 1:22 PM
G-SAFE (1617) Demo - demo laxson 2045 de la Métropole Longueuil, Québec, G8J 1L8, Canada

Device Status Table:

MODEL	INVENTORY	ACTIVE	SUSPENDED	DEACTIVE
G-Safe	0	2	0	0

Annotations:

- Blue arrow pointing to Total Alerts: 17
- Yellow arrow pointing to Total Devices: 2
- Yellow arrow pointing to Total Online Device: 1
- Yellow arrow pointing to Device Status table
- Blue arrow pointing to Latest Alerts list

Menu 'Devices'

ConexGo V 1.0.0 Mon, 11 September 2023 12:54:33 PM English - US den

Home / Devices

Download

Search...

Number to Display: 10

NAME	STATUS	LAST CONNECTION / LOCATION	IMEI/PHONE NUMBER
G-SAFE (1617) Demo	Active	Sep. 11, 2023 12:53 PM 501 Rue Bériault, Longueuil, QC J4G 1Z1, Canada	861475030741617 +16395510149
DEMO G-SAFE SYLVAIN (4176)	Active	Sep. 11, 2023 12:50 PM REQUEST_DENIED	861475030714176 +16395517735

List of your units

Status of each unit

Date an time of the last connection and exterior

Serial and assigned unit phone

Legend of the status:

- Turned on & online
- Turned off or offline
- GPS exterior location detected
- GPS Location not detected, maybe indicate that unit is indoors
- Battery status based on %

Unit dropdown menu

Drop-down menu including additional device functions

V 1.0.0 Mon, 11 September 2023 12:54:33 PM English - US den

Devices Home / Devices

Download

Search...

Number to Display: 10

NAME	STATUS	LAST CONNECTION / LOCATION	IMEI/PHONE NUMBER
G-SAFE (1617) Demo	Active	Sep. 11, 2023 12:53 PM 501 Rue Bériault, Longueuil, QC J4G 1Z1, Canada	861475030741617 +16395510149
DEMO G-SAFE SYLVAIN (4176)		Sep. 11, 2023 12:50 PM REQUEST_DENIED	861475030714176 +16395517735

- Map / Configuration
- Modify
- Alerts
- Data Logs
- SMS Logs
- Voice Logs
- Location Logs

Device Map/configuration

Overview of each of the device's submenus

In Map / Configuration: This will take you to the map location section and displays device parameters (if function visibility is activated)

G-SAFE (1617) Demo (861475030741617) - (+16395510149)

Last Reported : Sep. 11, 2023 1:01 PM

Unit status indication

Visibility of configured device parameters

Last known exterior location


511 Rue Bériault, Longueuil, QC J4G 1Z1, Canada
45.5661883 / -073.4743366
Sep. 11, 2023 1:01 PM

Laxson offers a turnkey service so that everything is configured correctly.

All devices are configured by Laxson, according to the information submitted by your company and they are inserted in each of the parameters segments.

Device contacts configuration menu


Laxson offers a turnkey service so that everything is configured correctly based on the information provided.

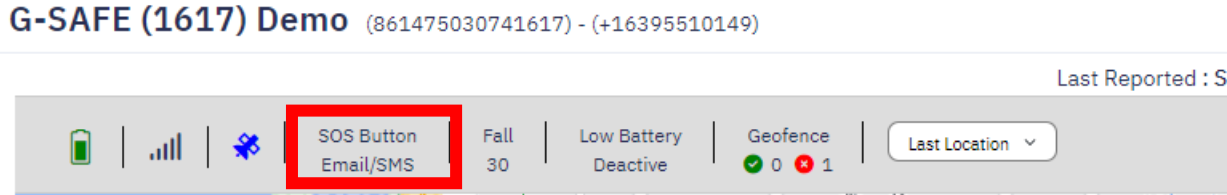

↑ Configured parameters of the device

All Devices are configured by Laxson, according to the information submitted by your company and they are inserted into each of the functionality segments in the portal.

- **SOS** – The list of number sequences that the device will dial during an SOS alert
- **Email alerts** – The emails of the people who will receive the alerts
- **SMS Alerts** – The SMS number of the people who will receive the alerts



It is your responsibility to update and verify the contact list on a regular basis, as these contacts where named as primary emergency contacts and must be available at all time to receive alerts or SOS call from the device.

Edit SOS Button SOS alert

Ignore Call : (If the Ignore Call is enable, no call will be created, only alerts will be sent.)

When the SOS button is pressed, it will phone the following numbers. If call is not answered within 9 seconds, the next number will be dialed.

User Defined Phone Numbers	
Phone Number #1:	+1(438)868-9240 Nancy
Phone Number #2:	Description
Phone Number #3:	Description
Phone Number #4:	Description
Phone Number #5:	Description

Email: +

When the alert occurs, an email message will be sent to the following addresses.

Sending To: support@laxsonsolutions.com x


SMS: + Please enter phone number in this format +1 etc.

When the alert occurs, an SMS message will be sent to the following addresses.

Sending To: +14388689240 x

Device contacts configuration menu


Fall detection settings:

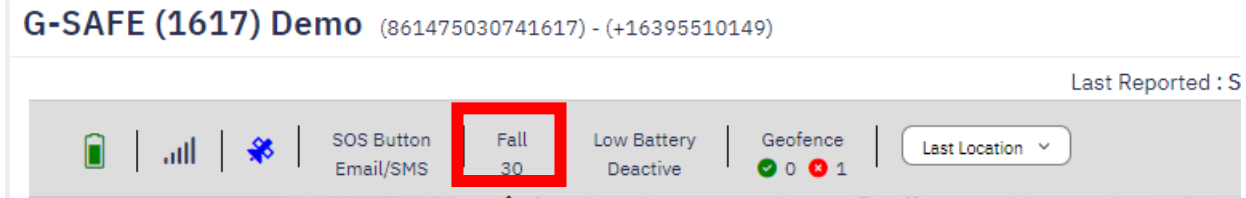

Configured parameters of the device

- **Status of the Fall detection** – Indicates whether fall detection is Enabled or Disabled for this unit
- **Sensitivity:** Indicates the sensitivity level the device has been configured to detect a fall.
- **Email alerts** – The emails of the people who will receive the alerts
- **SMS Alerts** – The SMS of the people who will receive the alerts

If you need to change the sensitivity of the device, you must let support know by email so that we can decrease or increase the sensitivity of the fall detection



Fall detection

Edit Fall Alert

Enabled: The fall detection for this unit is enabled.

Sensitivity: 30 Setting 25 is the standard default setting, (value between 20 least sensitive to 45 most sensitive).

Email: +
When the alert occurs, an email message will be sent to the following addresses.

Sending To: support@laxsonsolutions.com ✖

SMS: + Please enter phone number in this format +1 etc.
When the alert occurs, an SMS message will be sent to the following addresses.

Sending To: +1(438)868-9240 ✖

Device contacts configuration menu

Low battery alert setting:



Configured parameters of the device



You will have access to the Battery alert settings at all times to modify as appropriate

Edit Low Battery Alert

Enabled:


Battery Life: When the device's battery drops below this level, it will trigger an alert.

Email: +
When the alert occurs, an email message will be sent to the following addresses.
Sending To:

SMS: + Please enter phone number in this format +1 etc.
When the alert occurs, an SMS message will be sent to the following addresses.
Sending To:

Geofence (In & outbound zone alerts)

In some applications, it is necessary to receive zone entry or exit alerts as part of the worker's job function.

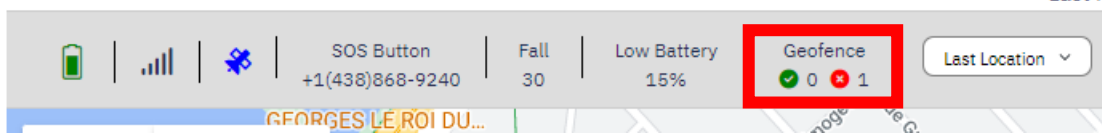

- The 'Geofence' function is the creation of virtual geolocation zones which are created with a civic address and a specific diameter.



Edit Geofence

#1 Zone Laxson ✓ #2 ✗ #3 ✗ #4 ✗ #5 ✗

Enabled:

Name:

Name to describe Geofence

Address:

Enter a street address (eg. 1 first ave., New York, NY) or Latitude/Longitude (45.737282,-72.37272)

Zone Size:

Enter the diameter of the geofence in meters (value between 50 and 9,999,999 m)

Direction: Incoming (Device enters the geofence.)
 Outgoing (Device exits the geofence.)

Email: +

When the alert occurs, an email message will be sent to the following addresses.

Sending To: email@gmail.com ✗

SMS: + Please enter phone number in this format +1 etc.

When the alert occurs, an SMS message will be sent to the following addresses.

Sending To:

A map view showing a red square geofence zone centered on a location in Longueuil, Québec. The map includes labels for 'Rue Bishop', 'Ch. de la Savane', 'Le Mythik Gourmand Pastries', and 'Longueuil Public Market'. The Google logo and 'Map data ©2023 Google' are visible at the bottom.

Creation of a zone

Creation of a zone for this device:

1. Activate the function
2. Enter the zone name
3. Enter the full address
4. Indicate the size of the area, min 100 meters to 9,999,999m
5. Indicate the direction of the alert, either Alert Entering or Leaving the area.
(If you want both types, you will need to create an alert for each, one incoming and one outgoing)
- 6) Indicate the email for receiving alerts
- 7) Save

Edit Geofence

Up to a maximum of 5 zones can be created per unit.

The screenshot displays the 'Edit Geofence' interface. At the top, a list of zones is shown: '#1 Zone Laxson' with a green checkmark, and '#2', '#3', '#4', and '#5' with red 'x' marks. Below this is a form for configuring the selected zone. The 'Enabled' toggle is turned on. The 'Name' field contains 'Zone Laxson'. The 'Address' field contains '2045 de la Metropole, Longueuil, Québec'. The 'Zone Size' is set to '150'. The 'Direction' is set to 'Incoming (Device enters the geofence.)'. To the right of the form is a map showing a red rectangular geofence area around 'Longueuil Public Market'. Below the map are sections for 'Email' and 'SMS' alerts. The 'Email' section has an empty field and a '+' icon. The 'SMS' section has an empty field and a '+' icon. At the bottom, there are four buttons: 'Save', 'Save and Close', 'Cancel', and 'Delete'. Blue arrows point to various elements: the 'Enabled' toggle, the 'Name' field, the 'Address' field, the 'Zone Size' field, the 'Incoming' radio button, the 'Email' field, and the 'Save' button.

Device settings: Modify the name of a device

Edit device: This allows you to edit the name of the Device

The image shows a user interface for managing devices. On the left, a table lists devices with columns for NAME and STATUS. The first device is 'G-SAFE (1617) Demo' with an 'Active' status. A dropdown menu is open for this device, with 'Map / Configuration' highlighted in a red box. A blue arrow points from this menu to an 'Edit Device' modal on the right. The modal has a title bar with a close button (x) and a 'Name' field containing 'G-SAFE (1617) Demo', which is also highlighted in a red box. Below the name field, the modal displays the following information:

Model	G-Safe
Status	Active
IMEI	861475030741617
Phone Number	+16395510149

At the bottom of the modal, there are 'Save' and 'Cancel' buttons. A blue arrow points to the 'Save' button.

View a specific device Alerts

Device Alerts: This allows you to see the list of latest alerts for this specific device

The screenshot shows the 'Alerts' interface. On the left, a sidebar menu has 'Alerts' highlighted with a red box. A blue arrow points from this menu to the main panel. The main panel is titled 'Alerts' and contains the following elements:

- Header: 'Alerts' and 'Home / Alerts'.
- Text: 'You can display by type of alerts' with a blue arrow pointing to a filter bar.
- Filter Bar: A red box highlights the filter bar containing 'SOS', 'Fall', 'Battery', 'Geofence', and 'Speed', each with a checked checkbox.
- Text: 'Export the file' with a blue arrow pointing to a 'Download' button.
- Search: A search bar with 'Search...' text.
- Table: A table with columns: ACTION, ALERT, DATE/TIME, DEVICE NAME, and ALERT COMMENT. The 'ALERT' and 'DATE/TIME' columns have red circles around their sort icons. A blue arrow points to these circles with the text 'Sort by type or date'.
- Table Data: The table contains several rows of alert data, including 'SOS Alert' for 'G-SAFE (1617) Demo'.

ACTION	ALERT	DATE/TIME	DEVICE NAME	ALERT COMMENT
	SOS Alert	Aug. 25, 2023 10:51 AM	G-SAFE (1617) Demo	Admin ConexGo No comment
	SOS Alert	Aug. 25, 2023 10:51 AM	G-SAFE (1617) Demo	Admin ConexGo No comment
	SOS Alert	Aug. 26, 2023 1:20 PM	G-SAFE (1617) Demo	Admin ConexGo No comment demo laxson Aucun commentaire
	SOS Alert	Aug. 26, 2023 1:26 PM	G-SAFE (1617) Demo	Admin ConexGo No comment

Device logs

Data Logs: List of specific logs for the selected device. Management of its use and display by date range

Data logs: The raw data list coming in from the device

DATE/TIME	MESSAGE	DIRECTION
Sep. 11, 2023 2:51 PM	#861475030741617,CMD-X#	Incoming
Sep. 11, 2023 2:48 PM	#861475030741617,CMD-X#	Incoming

SMS logs: List of SMS alerts

DATE/TIME	MESSAGE	DIRECTION
Aug. 30, 2023 9:29 AM	SOS Alert	Outgoing
Aug. 29, 2023 3:21 PM	SOS Alert	Outgoing

Voice logs: List of Voice call minutes incoming/outgoing

DATE/TIME	FROM NUMBER	TO NUMBER	CALL DURATION
Aug. 25, 2023 10:55 AM	+16395510149	+1(438)868-9240	10 seconds
Aug. 25, 2023 10:51 AM	+16395510149	+1(438)868-9240	13 seconds

Location history logs: List of location data

DATE/TIME	LOCATION
Sep. 11, 2023 2:11 PM	Sep. 11, 2023 2:11 PM 501 Rue Bériault, Longueuil, QC J4G 1Z1, Canada
Sep. 11, 2023 1:31 PM	Sep. 11, 2023 1:31 PM 501 Rue Bériault, Longueuil, QC J4G 1Z1, Canada

Map / Configuration

Modify

Alerts

Data Logs

SMS Logs

Voice Logs

Location Logs




Menu 'Groups'

Creation of groups to facilitate viewing of your device's status on a single page

The screenshot displays the ConexGo web interface. On the left, a navigation sidebar contains the following items: Home, Devices, Groups (highlighted with a red border), Alerts, and Users. The main content area is titled 'Groups' and features a 'Create a group' section with a yellow arrow pointing to a blue 'Add Group' button. Below this is a search bar with the placeholder text 'Search...'. The main content area currently displays '<No Data>'. At the bottom of the main content area, there are three icons: a blue square with a white document icon, a green square with a white circular arrow icon, and a red square with a white circular arrow icon. The top of the interface includes the ConexGo logo, version 'V 1.0.0', the date and time 'Mon, 11 September 2023 2:58:58 PM', a notification bell, a language dropdown set to 'English - US', and a user profile icon labeled 'demo'. The breadcrumb 'Home / Groups' is visible in the top right corner of the main content area.

Group creation

- 1) Input the name of your group
- 2) Save

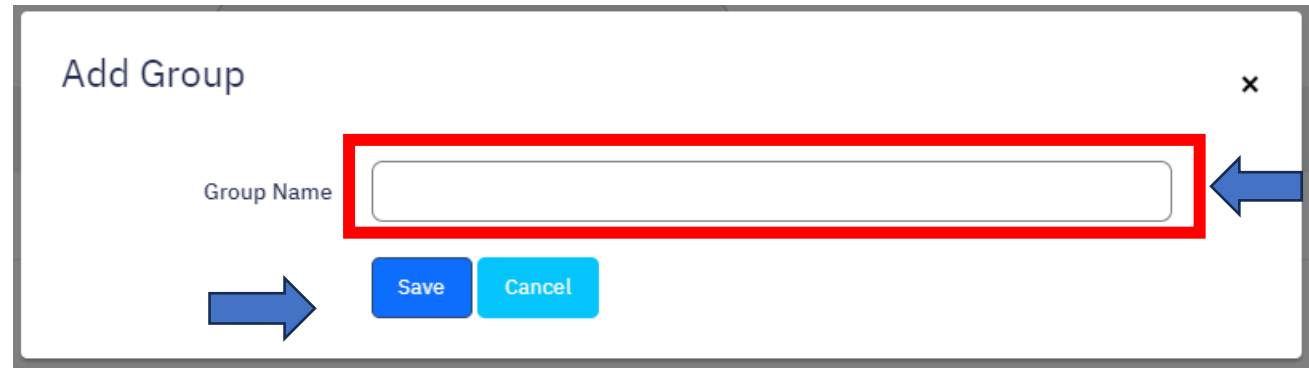


Add Group

Group Name

Save Cancel

- 3) In 'Action', you will see 3 buttons

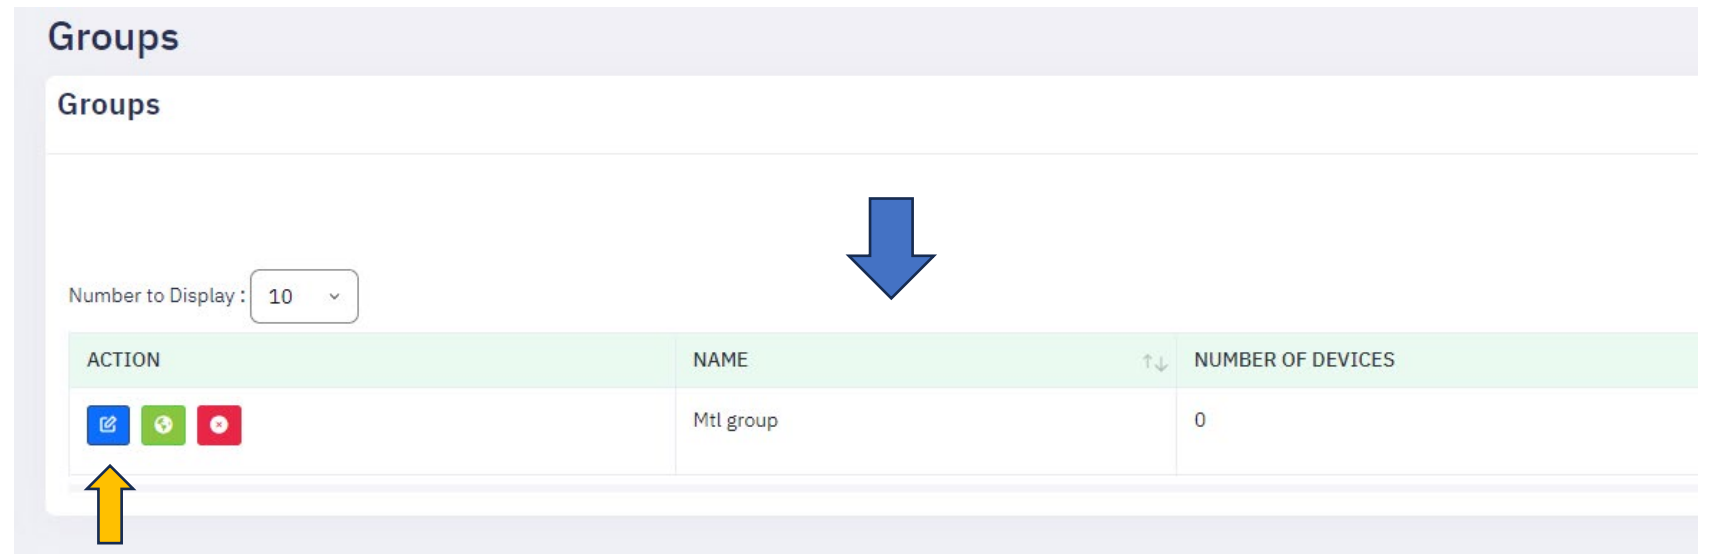


Click on the blue button, this will display another window to add the specific unit in your group.



Groups

Groups

Number to Display : 10

ACTION	NAME	NUMBER OF DEVICES
  	Mtl group	0

Group creation

Selecting your units for your group:

Check the units you wish to have in this group. A confirmation message will be displayed to confirm the selection.

Groups Home / Groups / Group Members

Group Members for Mtl group

Search...

Number to Display : 10

SELECTED	NAME	STATUS	IMEI	PHONE NUMBER
<input checked="" type="checkbox"/>	G-SAFE (1617) Demo		861475030741617	+16395510149
<input checked="" type="checkbox"/>	DEMO G-SAFE SYLVAIN (4176)		861475030714176	+16395517735

Once finished, you can click on the 'Groups' link to return to the 'Groups' menu.




Group creation

Your group will be created and the number of devices will be listed.

Groups Add Group

Search...

Number to Display : 10 ▾

ACTION	NAME	NUMBER OF DEVICES
  	Mtl group	2



Click on the green button to view your group




Display of your group



A quick visual display of your units and their status.



Groups Home / Groups / Group Members


Group Members for Mtl group


2 types of maps available

Map refresh 

NAME	STATUS	LAST REPORTED
G-SAFE (1617) Demo		Sep. 11, 2023 3:09 PM 501 Rue Bériault, Longueuil, QC J4G 1Z1, Canada
DEMO G-SAFE SYLVAIN (4176)		Sep. 11, 2023 3:09 PM REQUEST_DENIED

Map  Satellite 

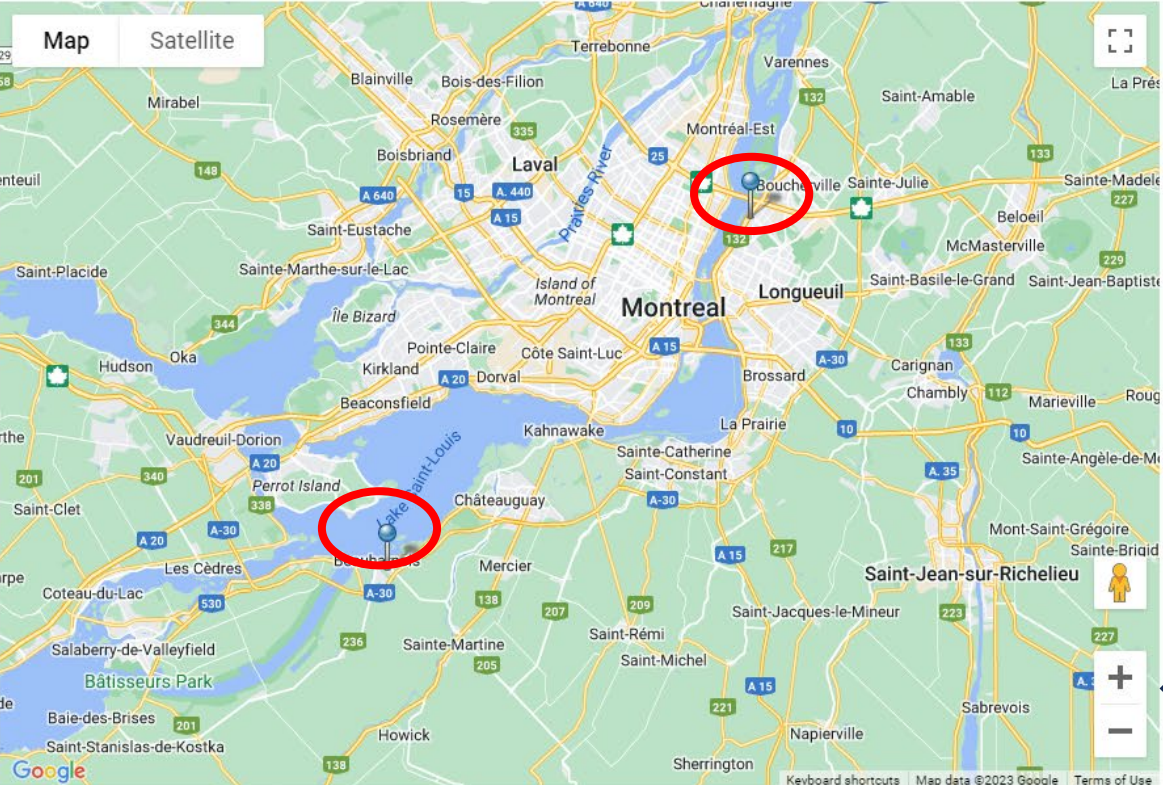

Zoom map function 

Visibility of the device's status and their last exterior location

Menu 'Alerts'

List of all account's alerts

ConexGo V 1.0.0 Mon, 11 September 2023 3:14:31 PM English - US demo

MAIN

- Home
- Devices
- Groups
- Alerts**
- Users

Alerts

Home / Alerts

Alerts

Increase lines display per page

Number to Display: 10

Date Range: Last 30 Days

Drop down date range selection

List by alert types

SOS Fall Battery Geofence Speed

Easy download excel report

Download

Search...

1 of 2

ACTION	ALERT	DATE/TIME	DEVICE NAME	ALERT COMMENT
	SOS Alert	Aug. 25, 2023 10:51 AM	G-SAFE (1617) Demo	Admin ConexGo No comment
	SOS Alert	Aug. 25, 2023 10:55 AM	G-SAFE (1617) Demo	Admin ConexGo No comment
	SOS Alert	Aug. 26, 2023 1:20 PM	G-SAFE (1617) Demo	Admin ConexGo No comment
	SOS Alert	Aug. 26, 2023 1:26 PM	G-SAFE (1617) Demo	Admin ConexGo No comment
	SOS Alert	Aug. 26, 2023 2:30 PM	G-SAFE (1617) Demo	Admin ConexGo No comment
	Battery Alert	Aug. 26, 2023 5:55 PM	DEMO G-SAFE SYLVAIN (4176)	Laxson Solutions TEst message agina
	Fall Alert	Aug. 28, 2023 1:35 PM	G-SAFE (1617) Demo	Admin ConexGo test msg
	SOS Alert	Aug. 28, 2023 1:37 PM	G-SAFE (1617) Demo	Admin ConexGo

You can sort
by date time
or by type

Alert visibility

Visibility of a specific alert:




By clicking on the 'blue eye' button in Action, this will open a window, detailing the alert and its last external location (if applicable)

Alerts

Alerts

SOS Fall Battery Geofence Speed

Number to Display: 10 Date Range: Last 30 Days

ACTION	ALERT	DATE/TIME	DEVICE NAME
	SOS Alert	Aug. 25, 2023 10:51 AM	G-SAFE (1617) Demo
	SOS Alert	Aug. 25, 2023 10:55 AM	G-SAFE (1617) Demo
	SOS Alert	Aug. 26, 2023 1:20 PM	G-SAFE (1617) Demo




Alerte: SOS Date/Heure: 8/25/2023 10:51:26 AM

Compte demo laxson 2045 de la Métropole, Longueuil, Québec G8J 1L8 Canada

Dispositif Nom: G-SAFE (1617) Demo Model: G-Safe IMEI:861475030741617

OpérateursAdmin ConexGo Duration: 0 Comment:

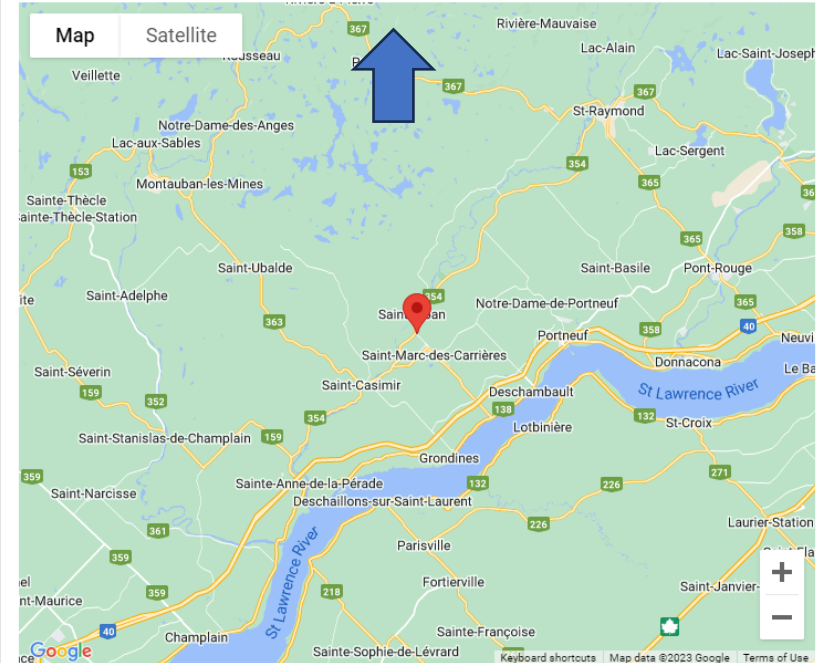

Map Satellite

Google

Keyboard shortcuts Map data ©2023 Google Terms of Use

Additional user creation

You can add user(s) for access to the units in your account. Additional users have limited rights.

The screenshot displays the ConexGo user management interface. On the left, a navigation sidebar includes 'Home', 'Devices', 'Groups', 'Alerts', and 'Users', with 'Users' highlighted by a red rectangle. The main content area is titled 'Accounts' and features a 'User' table with a blue 'Add User' button and a green 'Download' button. A yellow arrow points from the text 'To add a user' to the 'Add User' button. The interface also shows a search bar, a '<No Data>' message, and a user profile in the top right corner.

ConexGo

MAIN

- Home
- Devices
- Groups
- Alerts
- Users**

V 1.0.0

Mon, 11 September 2023 3 : 24 : 48 PM

English - US

demo

Home / User

User

To add a user

Add User


Download

Search...

<No Data>

Additional user creation

Add the new user information for login Please note that the email will be used for their user login to the portal.

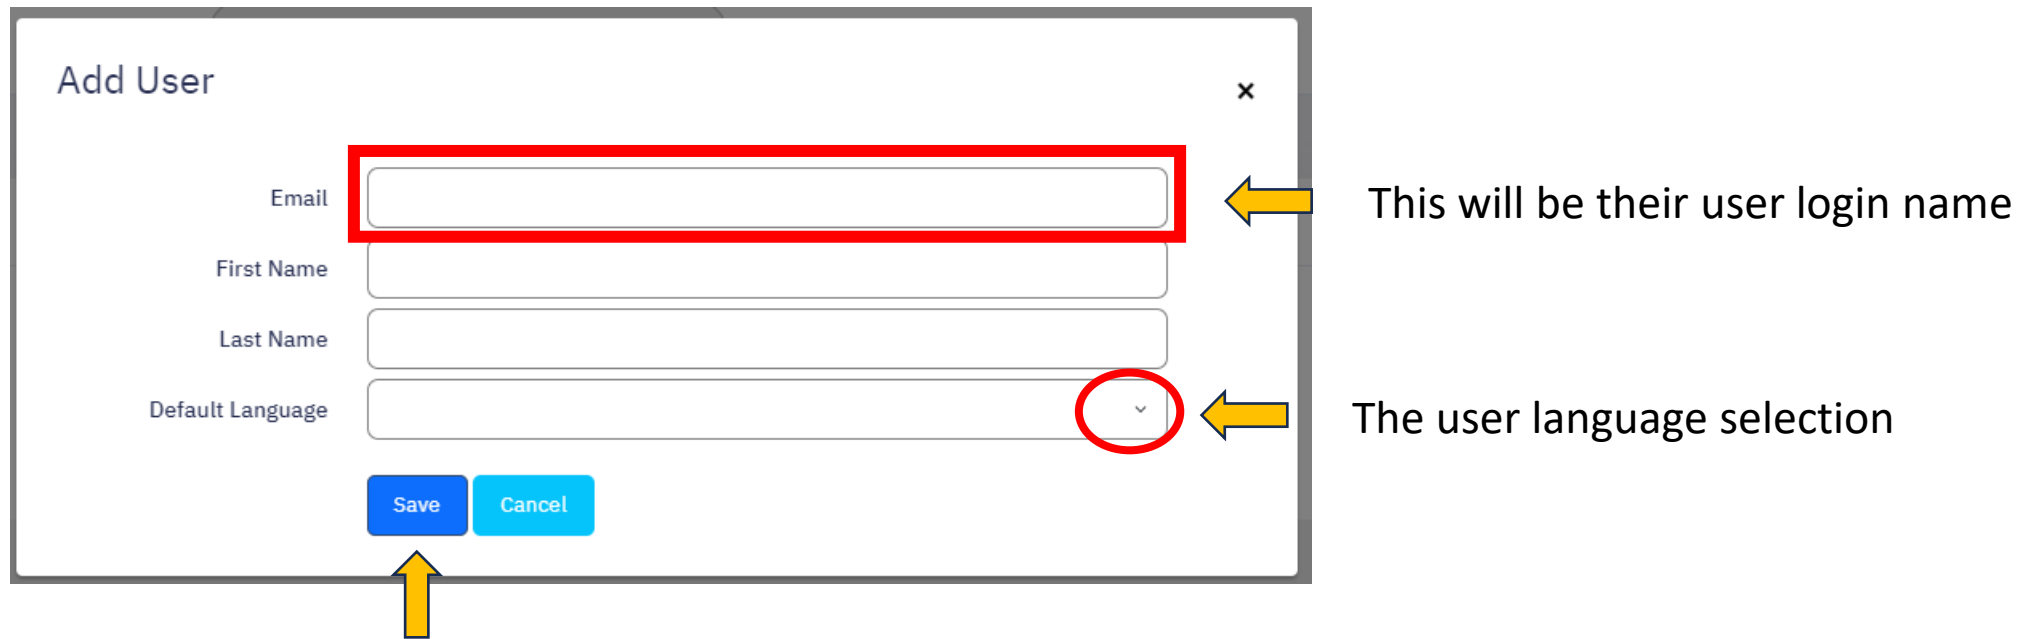

The screenshot shows a modal window titled "Add User" with a close button (x) in the top right corner. The form contains four input fields: "Email", "First Name", "Last Name", and "Default Language". The "Email" field is highlighted with a red rectangle, and a yellow arrow points to it from the text "This will be their user login name". The "Default Language" field is a dropdown menu, with a red circle around the downward arrow and a yellow arrow pointing to it from the text "The user language selection". At the bottom of the form are two buttons: "Save" (blue) and "Cancel" (light blue). A yellow arrow points to the "Save" button from the text "Save once done and a new user will be created."

Save once done and a new user will be created.

New users

Once the new user has been created, it will be listed in the user list. You will be able to modify this user and reset their password at any time.

Number to Display: 10

NAME

Peter Smith

Modify

Reset

Edit User

Email: nancy@laxsongmail.com

First Name: Peter

Last Name: Smith

Default Language: English - US

Save Cancel Suspend Delete

You also suspend or delete the user from here

Reset Password

Reset Password for:
Peter Smith
N/A
N/A, Québec N/A
Canada
nancy@laxsongmail.com

Reset Cancel

Success

Account Password successfully reset to Password123!

Home / User

Add User

The default password is: Password123!

New user access

Conexgo portal usage Terms and Conditions

These Terms of Service ("Terms", "Terms of Service") govern your relationship with the Conexgo.ca website (the "Service") operated by Conexgo ("us", "we", or "our").

Please read these Terms of Service carefully before using the Service.

Your access to and use of the Service is based on your acceptance of and compliance with these Terms. These Terms apply to all visitors, users and others who access or use the Service, without limitation.

By accessing or using the Service you agree to be bound by these Terms and accept all legal consequences. If you do not agree to these terms and conditions, in whole or in part, please do not use the Service.

Accounts

When you create an account with us, it is mandatory that you provide us information that is accurate, complete, and current at all times. Failure to do so constitutes a breach of the Terms, which may result in immediate termination of your account on our Service.

By continuing to access or use our Service after those revisions become effective, you agree to be bound by the revised terms. If you do not agree to the new terms, in whole or in part, we strongly insist that you cease using the website and the Service immediately.

Contact Us


If you have any questions about these Terms, please contact us immediately at support@conexgo.ca



1) When the user first logs in, they must accept the term of use of the portal in order to continue

New user login

New user will be invited to change your password

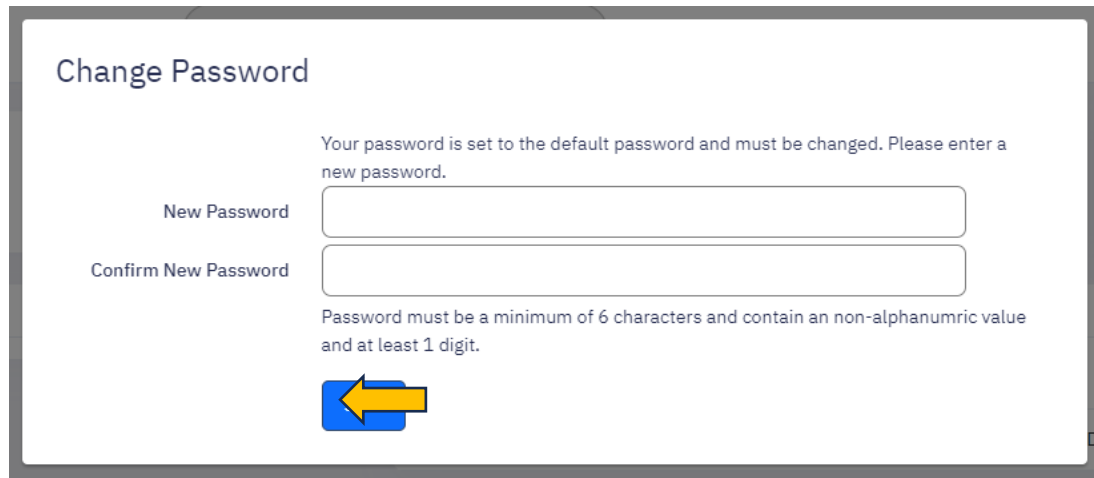

Change Password


Your password is set to the default password and must be changed. Please enter a new password.

New Password


Confirm New Password

Password must be a minimum of 6 characters and contain a non-alphanumeric value and at least 1 digit.

The password must be at least 6 characters long and contain a non-alphanumeric value and at least 1 number.

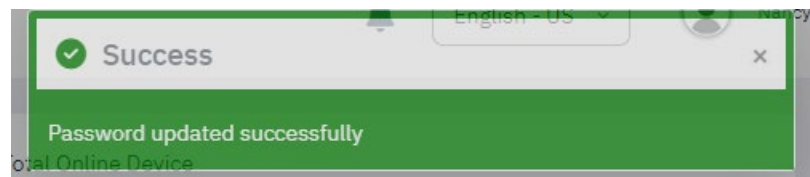

Selecting the time zone, either click Automatic time zone according to your PC *Recommended or select the time zone of your location. A success message will be displayed

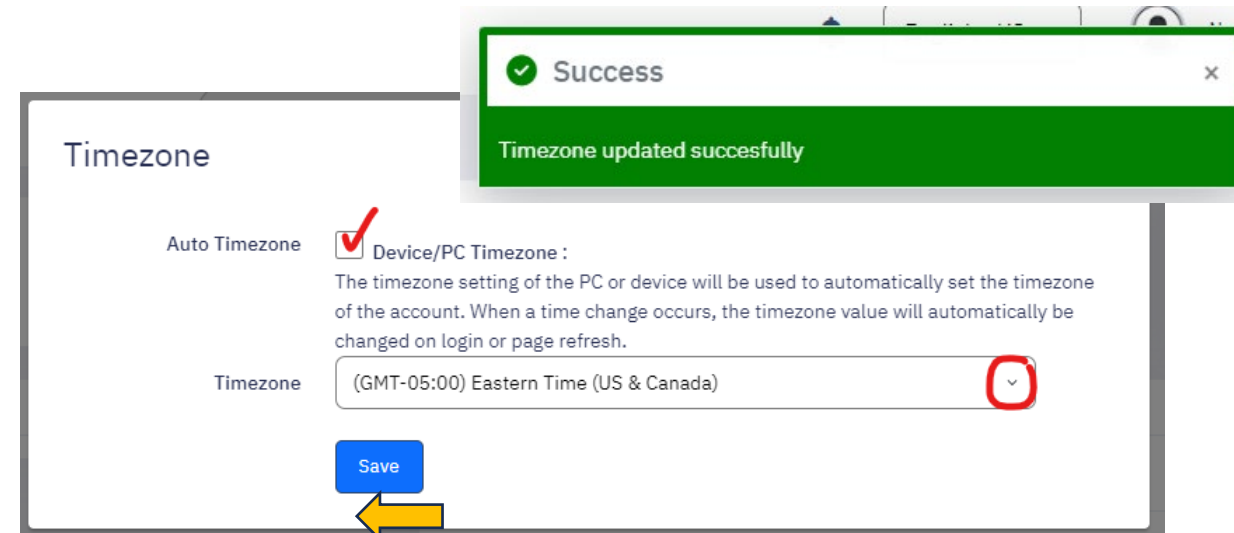

Timezone

Auto Timezone Device/PC Timezone :
The timezone setting of the PC or device will be used to automatically set the timezone of the account. When a time change occurs, the timezone value will automatically be changed on login or page refresh.

Timezone

Success

Timezone updated successfully

New user dashboard



ConexGo V 1.0.0 Tue, 12 September 2023 12 : 45 : 59 PM English - US Peter

MAIN

- Home
- Devices
- Groups
- Alerts

Total Alerts
17

Total Devices
2

Total Online Device
2

Latest Alerts

- 12%! Alerte de batterie faible 15 %** 2023-09-06 10:00 AM
DEMO G-SAFE SYLVAIN (4176) - demo laxson 2045 de la Métropole Longueuil, Québec, G8J 1L8, Canada
- 14%! Alerte de batterie faible 15 %** 2023-09-04 7:04 PM
DEMO G-SAFE SYLVAIN (4176) - demo laxson 2045 de la Métropole Longueuil, Québec, G8J 1L8, Canada
- SOS Alert** 2023-08-31 6:08 AM
G-SAFE (1617) Demo - demo laxson 2045 de la Métropole Longueuil, Québec, G8J 1L8, Canada
- SOS Alert** 2023-08-30 12:00 PM
G-SAFE (1617) Demo - demo laxson 2045 de la Métropole Longueuil, Québec, G8J 1L8, Canada
- SOS Alert** 2023-08-30 10:01 AM
G-SAFE (1617) Demo - demo laxson 2045 de la Métropole Longueuil, Québec, G8J 1L8, Canada

Device Status

MODEL	INVENTORY	ACTIVE	SUSPENDED	DEACTIVE
G-Safe	0	2	0	0

The new user will then have access access their dashboard



laxsoncanada.ca